

MODULIGHTOR - Configured to your specification

CH 07 Quadron

FINISHES

Black
White
Polished Chrome
Brushed Chrome
Polished Golden Brass
Polished Nickel
Brushed Nickel
Bronze Powder Coat "Flat"

MOUNTING METHODS

The most typically specified mounting MM01B (suspended by stems, and hardwired through a stem—with No screws visible) –


LAMPS

LED Lamps - 2700K or 3000K
5 W - (50w equivalent) 600 Lumens
6 W - (75w equivalent) 720 Lumens
90 CRI (color rendering index)
DC Bayonet (close to zero UV) 120V
Dimmable - ETL Listed

LED Board - 2700K or 3000K
120 Volts
12 W 1440 Lumens
95 CRI (color rendering index)
Dimmable - ETL Listed

JD Krypton Lamps (Blocks UV)
120 Volts
20, 40, 60 Watts
Dimmable - ETL Listed

JD Halogen
130 Volts
50, 75 Watts
Dimmable - ETL Listed

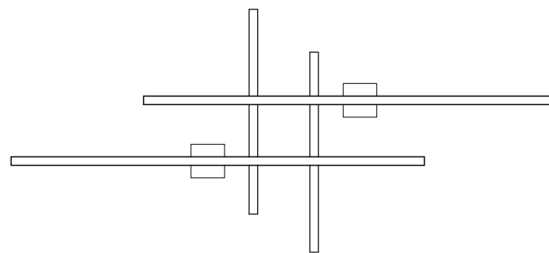

Reflected Ceiling Plan

Designed by PAUL RUDOLPH - Up-Light chandelier

Minilux SQ—approximately "Square" extrusion shape

Dimensions & proportions are adjustable: this fixture can be almost any length & width – and creative variations on this classic design can help solve problems in many settings.

Also available with "Down" openings for the lights (when specified with bulbs)

No transformer or driver necessary

Dimmable

ETL Approved to meet UL Standards